



Truck Mounted 680



Truck Hydraulic Drive



Custom Truck Bumpers



430 Right Discharge



680 Right Discharge



*The "REEL" Efficient TMR Mixer*

Standard Features,  
All Models

Extremely low horsepower usage  
Low friction poly liners reduces fuel cost and increases life

Low loading height  
Left or right side discharge

Rapid tumbling action; less fines, less compacting  
Sweep belting on Reel picks up small grains and cleans out mixer


Additional 560/680  
Standard Features

Integrated magnet in discharge conveyor

Ganged grease zerks

All chains in sealed oil baths for low maintenance  
Hydraulic drive discharge conveyor

Trailer mounted mixers					Truck mounted mixers		
Capacity Cu Ft (Bu)	340 (230)	430 (300)	560 (390)	680 (475)	Capacity Cu Ft (Bu)	430 (254)	680 (475)
Loading height **	7' 8"	8'	8'	8' 7"	Loading height on 2WD truck*	8' 6"	9' 2"
Overall height	8' 2"	8' 6"	9' 8"	10'	Overall height on 2WD truck*	9'	10' 6"
Reel size	5' 10" X 12'	5' 10" X 15'	6' 8" X 15'	7' 4" X 15'	Reel size	5' 10" X 15'	7' 4" X 15'
Empty weight	6,700	8,100	12,600	13,400	Empty weight of mixer	6,850	10,256
Hitch weight (empty)	700	820	1,300	1,400	Overall length of mixer	17' 5"	18'
Overall length of mixer	13' 9"	16' 9"	17' 10"	17' 10"	Hydraulic reservoir capacity	55 gal	55 gal
Overall length	18' 3"	21' 5"	22' 2"	22' 2"	Horsepower to mix	13 Hp	19 Hp
Overall width tire to tire	7' 10"	8' 4"	8' 9"	10' 3"	Horsepower from PTO	25 hp	30 hp
Overall width with 5' elevator	9' 3"	9' 8"	10' 9"	11' 3"	Recommended cab to axle	~142"	~142"

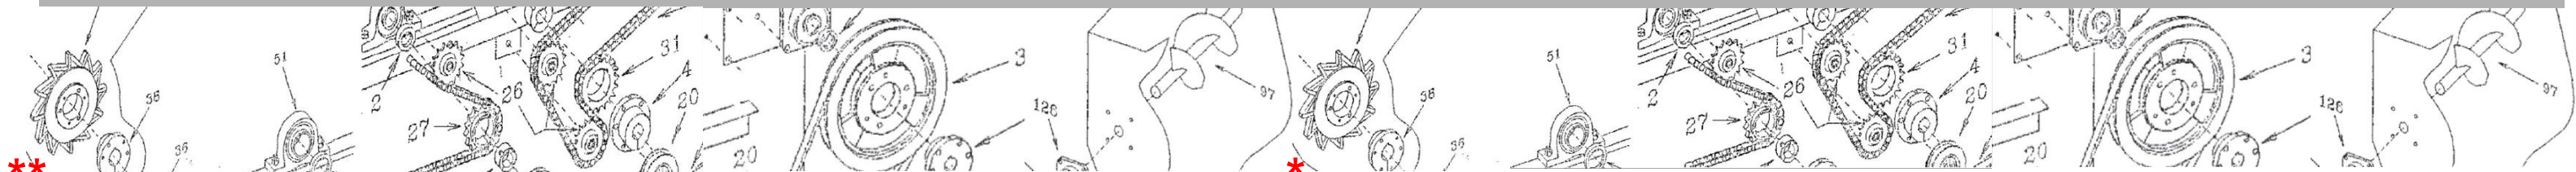

\*\* We recommend loading from the discharge (high) side to prevent damage to the machine

\* Our best estimate, trucks will vary. Also note we mount many mixers on 4 (all) wheel drive trucks



Super Bright LED Remote



Loader Bars



Bunk Guards



Break-Away and/or integrated Magnet



Tire Options



The "REEL" Efficient TMR Mixer

**Mixer Options:**

- Right or left-hand discharge
- Break-A-Way or Integrated magnet
- Discharge "hood"
- Bunk guards
- Loader Bars
- 1000 or 540 RPM PTO
- Stop, turn and tail lighting
- Tire options
- Discharge elevator length
- Stationary models\*

**Scale Options:**

- Choice of Weigh-Tronix or Digi-Star 4-point scale
- Wired or wireless remote displays
- Wireless zeroing switch
- Large 4" super bright LED remote displays

**Truck mounted mixers:**

- 100% hydraulic drive, electronic control
- Fully integrated with the automatic transmission
- Extremely low power requirement



680 truck Mount



Truck Control Box

\* We can equip all of our stationary mixers to run on 220 V single phase



INTEGRATED MAGNET IN ELEVATOR

POLY FACE

MAGNET 3/8" BELOW POLY

FARM AID EQUIPMENT, INC., 40 EAST 1<sup>ST</sup> STREET, CORSICA, SD 57328

Phone (605) 946-5479 Fax (605) 946-5899 www.farmaidmfg.com

